




Fieldbus Cable RS 485 WorldFip

FB-02YS(ST+C)H FC 1x2xAWG22/1 VE2R

FAST CONNECT

Installation Cable

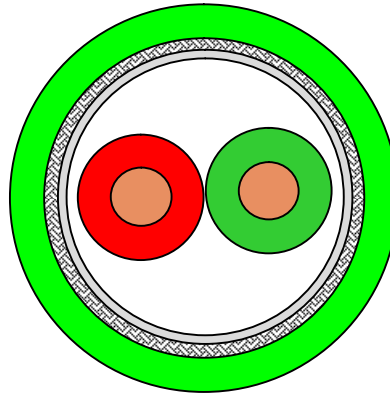

Application

RS 485 Multi Point communications network up to 10 Mb/s
WorldFIP

Standards

EIA/TIA

Fire Rating

IEC 60332-3 24

Construction

Conductor	bare copper wire Ø 0.645 mm (AWG 22)
Insulation	Foam skin Polyethylene, Ø 2.3 mm
Twisting	2 cores to the pair Ø 4.6 mm
Inner sheath	FRNC Megolon S534, colour white, Ø 5.5 mm
Pair screen	Al-laminated plastic foil, Al outside Ø 5.6 mm
Overall screen	Copper braid, tinned (approx. 80% coverage) Ø 6.2 mm
Outer sheath	FRNC, green RAL 6018 Megolon S534 Ø 7.4 mm (the cable should be round) wall thickness 0.60 mm
Marking	DRAKA – RS 485 WORLDFIP – FMS/DP - CERN VE2R –year of manufacturing and length marking

Mechanical properties

Bending radius	≥ 55 mm without load, ≥ 110 mm with load
Temperature range, during operation during installation	-35°C up to + 85°C -5°C up to + 50°C
Corrosivity	acc. to IEC60754-2
Smoke density	acc. to IEC 61034



Fieldbus Cable RS 485 WorldFip

FB-02YS(ST+C)H FC 1x2xAWG22/1 VE2R

FAST CONNECT

Electrical properties

at 20°C

DC loop resistance	≤ 110 Ω /km
Resistance unbalance	≤ 4%
Insulation resistance (500 V)	≥ 2000 MΩ *km
Capacitance at 800 Hz	nom. 30 nF/km
Capacitance unbalance (pair to ground)	≤ 1000 pF/km
Characteristic impedance at (250 kHz-3 MHz) (3 MHz-20 MHz)	(150 ± 15) Ω (150 ± 15) Ω
Nominal velocity of propagation	approx. 78 %
Propagation delay	≤ 430 ns/100m
Attenuation at 9.6 kHz 38.4 kHz 4 MHz 16 MHz 20 MHz	≤ 3 dB/km ≤ 5 dB/km ≤ 22 dB/km ≤ 45 dB/km ≤ 51 dB/km
Test voltage (DC, 1 min)	1000 V (Core/Core and Core/Screen)
Transfer impedance	at 100 kHz nom 1 mΩ/m at 1 MHz nom 3.5 mΩ/m at 10 MHz nom 2.5 mΩ/m at 20 MHz nom 3.5 mΩ/m

Technical data

Product code	Designation	Brand name	Outer diameter	Fire load		Weight	Copper content	Tensile force
				MJ/km	kWh/m			
			mm			kg/km	kg/km	N
1003051 CS7605801	02YS(ST+C)H 1x2xAWG22/1	FB-02YS(ST+C)H FC 1x2xAWG22/1 FAST CONNECT	7.4			70	23.2	100